CONNECTED ACCESS PORTAL, HIGH CAPACITY

KEY FEATURES

Smart Access Control Software

10", 720p High-Def Interface

Easy Setup and Programming

SMART

INTUITIVE INTERFACE WITH COLOR TOUCH DISPLAY FOR SUPERIOR RESIDENT AND GUEST USABILITY.

CUSTOMIZABLE BACKGROUND ON A 10", FULL-COLOR, 720p HIGH-DEFINITION SCREEN.

REMOTE PROGRAMMING AND ACTIVITY MONITORING USING myQ[®] Business™.

CONFIGURABLE EMAIL NOTIFICATIONS: KNOW WHEN CODES ARE OVERUSED OR IF SERVICE IS NEEDED FOR THE CAPXL, CAP2D OR GATE OPERATOR.

ELIMINATE TRENCHING WITH WI-FI® AND WIRELESS LINK TO LIFTMASTER® GATE OPERATORS.

RELIABLE

VOICE OVER IP (VoIP) PROVIDES CRYSTAL-CLEAR CALL QUALITY WITH NO LONG-DISTANCE CHARGES.

STAINLESS STEEL FOR A MODERN, DURABLE DESIGN.

LOCAL SYSTEM MEMORY ALLOWS RESIDENTS TO ENTER EVEN WHEN THE INTERNET IS DOWN.

SECURE

GET ALERTED WHEN A SUSPENDED CODE IS USED OR IF AN ACTIVE CODE IS BEING OVERUSED.

REAL-TIME ACTIVITY TRACKING WITH myQ[®] Business™.

CLOUD-BASED SECURITY KEEPS DATA PROTECTED AND SAFEGUARDS RESIDENT INFORMATION.

Cloud-based access control for residential communities.

TOTAL SOLUTION ACCESSORIES:

CONNECTED ACCESS PORTAL, 2-DOOR CONTROLLER

Cloud-based, credentialed access control.



CAP2D

CELLULAR 4G/LTE MODEM WITH WI-FI

Makes it easy to connect CAPXL and CAP2D(s) anywhere.



TRIM KIT AND BACK KIT

Conceal openings left from other systems in flush-mount, infinity L and icon installations.



PASSPORT REMOTE CONTROLS

PPV3M/PPK3PHM/PPLK1-X Visor and keychain remotes with unique credentialed IDs.



PASSPORT

multiclass® SE RP10 MINI **MULLION AND PROXIMITY CARD**

LMMC-MINI Reader and LMPC2-ST Proximity Card for credentialed access.



RFID LONG-RANGE READER AND VEHICLE TAGS

LMSC1000/LMUNTG/LMHNTG Reader, universal tag (windshield/ headlamp) and hang tag.



ANTENNA MOUNTING KIT

For extending radio and Wi-Fi range or remote mounting of antenna.



GATE OPERATORS

CSW24UL/CSL24UL/HCTDCUL Ensure quick and safe access for residential communities. Pair with CAPXL for remote system diagnostics.







MASTERFUL ENGINEERING.

CAPACITIES



- -4 Controlled Gates/Doors
- -Wireless Link for up to 8 LiftMaster® Operators
- -4 to 8 Digit Entry Codes
- -4 to 6 Digit Directory Codes
- -50,000 Local Resident Capacity
- -50,000 Local Event History
- -Multiple, Holiday and Hold-Open Scheduling, Including One-Time and Repeating Exceptions
- Compatible Wiegand Formats: 26-, 30- and 37-Bit
- No Facility Code Limitations (1-256 for 26-Bit); "Ignore Facility Code" Option Available

POWER



- Input 120VAC Relay Outputs (Transformer Included)
- UL® Listed

-CAPXL:

- Output 3 Amps

DIMENSIONS




- 18" x 14" x 4.5"
- -CAPXLTK (Outer Trim): 23.75" x 19.375"



MECHANICS



- -10", 720p High-Definition Touch Display
- -Fade- and Glare-Resistant Display
- Outdoor Stainless-Steel Housing, Brushed Finish on Front Door, Powder-Coated Rear Housing
- -Built-In Security+ 2.0® Radio
- Postal Lock Provision
- Surface, Flush (CAPXLTK) or Pedestal (PED42, PED64) Mount
- Camera Ready; Use Any Standard Pinhole Camera

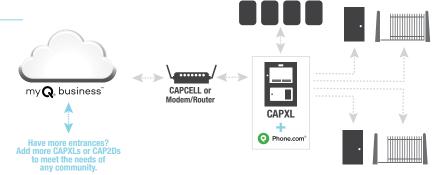

myQ[®] Business™ subscription required.

STANDARD SPECS.

COMMUNICATION

INTERNET (DYNAMIC OR STATIC IP)

- Wi-Fi®
- High Speed
- -DSL with at Least 1 MB Download Speed
- Cellular (Optional CAPCELL)

VOICE

LMPAFNPGCAXL 2/19

- VoIP (Voice over IP)
- Phone.com® Service Required for VoIP

ONBOARD RADIO

- Security + 2.0 for Passport Remote Controls
- Wireless Link to UL 325 Gate Operators Manufactured After October 2017
- Retrofit Kits Will Be Available for Operators Manufactured Between January 2016 and October 2017
- HomeLink® IV and V Compatible*

*Requires HOA or Management Assistance

WARRANTY

-2-Year

INPUT PORTS

- 4 Wiegand Inputs
- 4 Request-to-Exit (REX) Inputs
- 4 Supervised Inputs
- -1 Auto-Call Input (Requires LPEXP)

OUTPUTS

- 4 Primary Relays
- 4 Auxiliary Relays
- -1 Wiegand Output

OPERATING TEMPERATURE

-20°F to 130°F (-29°C to 54°C)

SHIPPING.

SHIPPING WEIGHT (in lbs.)



CARTON (1)

23" x 18" x 9"

- CAPXL
- 24VDC Power Supply
- 2 Keys
- Radio Antenna
- Wi-Fi Antenna
- Misc. Hardware

For Support Tools and Training Videos, Visit LiftMasterTraining.com

For More Information, Visit LiftMaster.com/AccessControl

Sales Support: **800.282.6225**

Technical Support Center: 800.528.2806 LiftMasterDealer.CustHelp.com/App/Ask

© 2019 The Chamberlain Group, Inc. All Rights Reserved. LiftMaster, the LiftMaster logo, myQ and the myQ logo are registered trademarks of The Chamberlain Group, Inc. 300 Windsor Drive, Oak Brook, IL 60523 LiftMaster.com

Wi-Fi® is a registered trademark of Wi-Fi Alliance UL® and the UL logo are trademarks of UL LLC © 2019 All Rights Reserved.

HomeLink® and the HomeLink House® logo are registered trademarks of Gentex Corporation. © 2019 HID Global Corporation/ASSA ABLOY AB. All rights reserved. Copyright @ 2019 Phone.com®

LiftMaster