THE RIGHT SOLUTION.

LiftMaster's full line of access control products and software allows for seamless solutions designed to meet the exact requirements of any property.

HIGH-RISE COMMUNITY OR COMMERCIAL SITE

GATED SINGLE FAMILY HOME

GATED COMMUNITY

MIXED-USE BUILDING WITH GARAGE

SAFETY AND CONTROL WHERE IT MATTERS MOST.

Whether it's a single family home, a gated community or a larger multi-use building, communities of all sizes count on LiftMaster® to provide trusted and reliable access every day. The LiftMaster suite of products seamlessly work together for all your hardware and software needs. Confidently manage access of your community with a LiftMaster solution.

myQ® Business™ SMART ACCESS

ENABLES YOU TO MANAGE MULTIPLE ACCESS POINTS AND MULTIPLE PROPERTIES FROM A SINGLE DASHBOARD WITH YOUR COMPUTER, TABLET OR SMARTPHONE FROM ANYWHERE.

MULTIPLE WAYS TO CONNECT TO myQ® Business™

PROACTIVE REMOTE MANAGEMENT
Live, Web-Based Access

SECURE CONTROL
Monitoring and Alerts

CONTROL EVERY ENTRANCE
With a Single Database

RESIDENTIAL GATED COMMUNITY.

Our most intuitive access control solution. Whether you need to control multiple entrances or properties, the CAPXL and CAP2D powered by myQ® Business™ software make it easy to manage day-to-day operations from anywhere. Perfect for retrofit or new installations, this plug and play access control works seamlessly with LiftMaster Gate Operators and Accessories to keep your community moving.

CONNECTED ACCESS PORTAL, HIGH CAPACITY
CAPXL

CONNECTED ACCESS PORTAL, 2-DOOR CONTROLLER
CAP2D

SINGLE ENTRY ACCESS CONTROL KEYPAD AND PROXIMITY READER
KPR2000

CELLULAR 4G/LTE MODEM WITH WI-FI®
CAPCELL

RFID SYSTEM READER & TAGS
LMSC1000/LMUNTG*/
LMHNTG*

HIGH-TRAFFIC SWING GATE OPERATOR
CSW24UL

MONITORED RETRO REFLECTIVE PHOTO EYE
LMRRUL

3-BUTTON PASSPORT MAX MINI KEYCHAIN REMOTE CONTROL
PPK3M

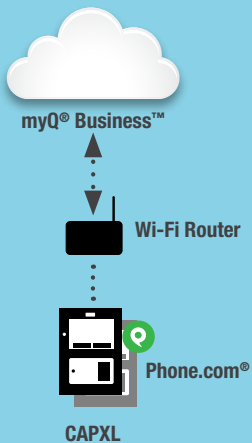myQ® Business™
SMART ACCESS CONTROL

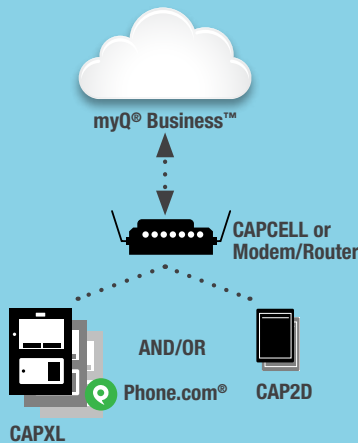*If specific facility code and start ID are required, use special part numbers SPLMUNTG and SPLMHNTG.

CONTROL SOFTWARE.

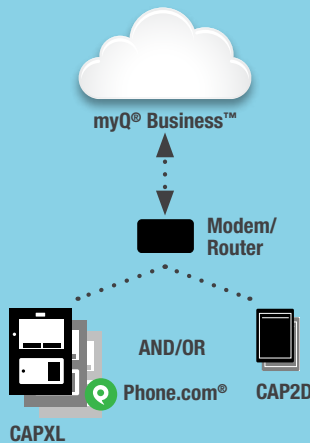## CHOOSE THE EASIEST WAY TO CONNECT FOR VOICE AND myQ® Business™:

WI-FI®*

myQ® Business™

Wi-Fi Router

Phone.com®

CAPXL

CELLULAR

myQ® Business™

CAPCELL or Modem/Router

AND/OR

Phone.com®   CAP2D

CAPXL

WIRED HIGH-SPEED

myQ® Business™

Modem/Router

AND/OR

Phone.com®   CAP2D

CAPXL

DSL

myQ® Business™

DSL/Modem

AND/OR

Phone.com®   CAP2D
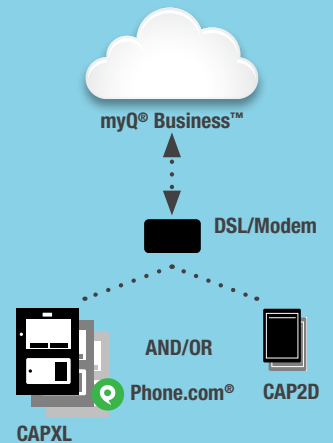
CAPXL

*CAPXL only

LiftMaster

HIGH-RISE COMMUNITY OR COMMERCIAL BUILDING.

The vibrant, high-definition touchscreen of CAPXL with myQ® Business™ paired with the ultra-quiet HCTDCUL help retain and attract residents while making it easy to manage day-to-day operations from anywhere. Our smart technology features remote diagnostics, email notifications and require nothing to download or sync.

myQ® Business™
SMART ACCESS CONTROL

CONNECTED ACCESS PORTAL, HIGH CAPACITY
CAPXL

CONNECTED ACCESS PORTAL, 2-DOOR CONTROLLER
CAP2D

SPECIALTY OVERHEAD OPERATOR
HCTDCUL

THROUGH-BEAM PHOTO EYE
CPSUN4G

RFID SYSTEM READER & TAGS
LMSC1000/LMUNTG*/LMHNTG*

SINGLE ENTRY ACCESS CONTROL KEYPAD AND PROXIMITY READER
KPR2000

WIRELESS COMMERCIAL KEYPAD
KPW250

1-BUTTON PASSPORT LITE MINI KEYCHAIN REMOTE CONTROL
PPLK1-10

*If specific facility code and start ID are required, use special part numbers SPLMUNTG and SPLMHNTG.

MIXED-USE BUILDING WITH PARKING GARAGE.

An affordable door controller at each entrance provides instant tracking, remote management and resident access control. Ideal when a Telephone Entry System is not required, the CAP2D is easy to install and program from anywhere.

myQ® Business™
SMART ACCESS CONTROL

CONNECTED ACCESS PORTAL, 2-DOOR CONTROLLER
CAP2D

SINGLE ENTRY ACCESS CONTROL KEYPAD AND PROXIMITY READER
KPR2000

CREDENTIAL ACCESS RECEIVER
PPWR

3-BUTTON PASSPORT MAX MINI KEYCHAIN PROXIMITY REMOTE CONTROL
PPK3PHM

MEGA ARM TOWER BARRIER GATE OPERATOR
MAT

SMALL GATED COMMUNITY.

The EL2000SS and the EL25 are two access solutions featuring cloud database backup. Each offers cost-effective, reliable access and expandability across multiple entry points, while providing the safety and control residential communities desire. The addition of the KPW250 is a great stand-alone solution for residential-only back gate entrances.

TELEPHONE ENTRY/ACCESS CONTROL SYSTEM
EL2000SS

TELEPHONE ENTRY/ACCESS CONTROL SYSTEM
EL25

WIRELESS COMMERCIAL KEYPAD
KPW250

3-BUTTON PASSPORT MAX VISOR REMOTE CONTROL
PPV3M

CREDENTIAL ACCESS RECEIVER
PPWR

RESIDENTIAL SLIDE GATE OPERATOR
RSL24UL

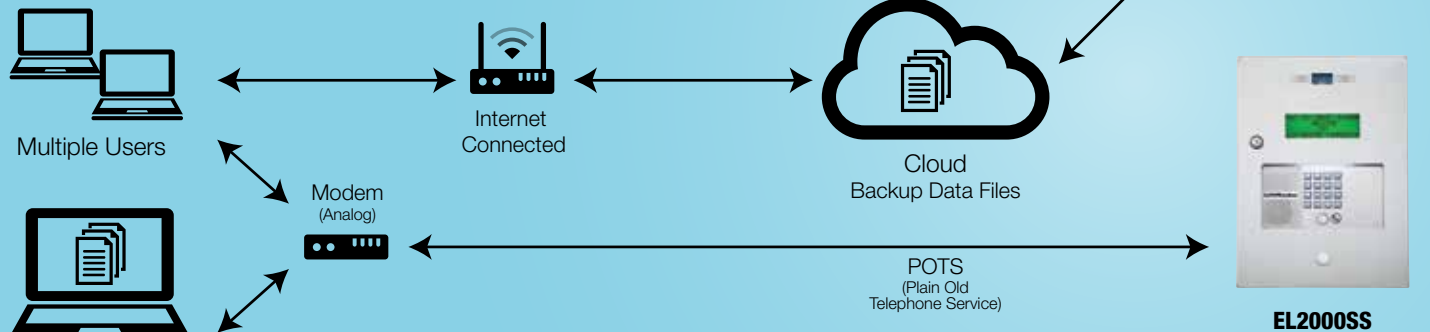**MONITORED RETRO REFLECTIVE PHOTO EYE**
LMRRUL

MONITORED SMALL PROFILE RESISTIVE EDGE WITH ALUMINUM CHANNEL 5 FT.
S505AL

VERSA BACKUP CLOUD STORAGE

VERSA XS SOFTWARE.

ACCESS CONTROL MANAGEMENT FOR THE EL2000SS AND EL25 WITH NEW USER INTERFACE

Cloud Storage Option
Data stored in the Cloud, internet connection required (multiple PCs)

Multiple Users

Internet Connected

Cloud
Backup Data Files

Modem
(Analog)

POTS
(Plain Old Telephone Service)

EL25

EL2000SS

Stand-Alone User

Stand-Alone Option
Data stored locally, no internet connection required (one PC only)

LiftMaster
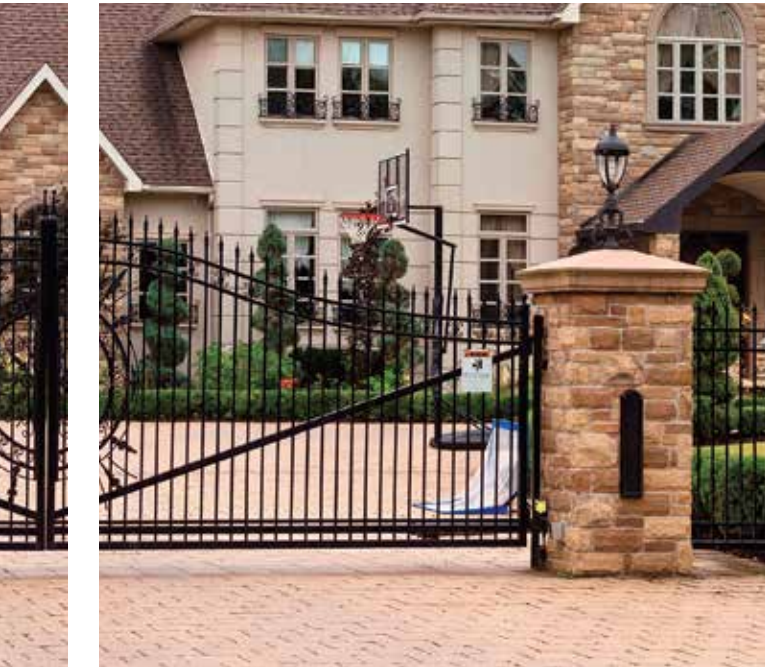
GATED SINGLE FAMILY HOME.

The quick and easy intercom solution that lets homeowners operate their gate from inside their home without adding additional costs to their phone bill. The EL1SS is a durable, economical solution that ensures added convenience and control from the gate to the garage. Also use myQ® technology to control both the gate and garage door openers.

TELEPHONE INTERCOM AND ACCESS CONTROL SYSTEM
EL1SS

INTERNET GATEWAY
828LM

RESIDENTIAL LINEAR ACTUATOR SWING
LA500PKGUL

MONITORED RETRO REFLECTIVE PHOTO EYE
LMRRUL

SECURITY+ 2.0® 3-BUTTON REMOTE CONTROL
893MAX

SOLAR PANEL
SP10W12V

ELITE SERIES® DC BATTERY BACKUP BELT DRIVE WI-FI® GARAGE DOOR OPENER
WLED

STAND-ALONE ENTRANCE.

Our wireless keypad solutions provide convenient access for one or more entrances without trenching wires. They can also be paired with a remote control.

WIRELESS COMMERCIAL KEYPAD
KPW250

COMMERCIAL ACCESS RECEIVER
STAR1000

1-BUTTON PASSPORT LITE REMOTE CONTROL
PPVL1-10

COMMERCIAL SLIDE GATE OPERATOR
CSL24UL

MONITORED RETRO REFLECTIVE PHOTO EYE
LMRRUL

MONITORED SMALL PROFILE RESISTIVE EDGE WITH ALUMINUM CHANNEL 5 FT.
S505AL

LIFTMASTER SERVICE AND SUPPORT.

We at LiftMaster® are proud of the suite of products we have to offer, and want you to know we are your trusted partner before, during and after your purchase.

SALES SUPPORT
Our sales team is available to guide you to the proper products, or help design a customized solution to meet any and all application needs.
Phone: 800.282.6225

LIFTMASTER DEALER EXTRANET
For all of our LiftMaster customers, visit the Dealer Extranet at **Dealer.LiftMaster.com** for order status, technical support, collateral material, account-specific tools and other support materials.

CUSTOMER CARE
Our LiftMaster Customer Care representatives are here to help you with account-specific questions, from order placement to order status.
Phone: 800.323.2276
Email: Customer.Service@LiftMaster.com

TECHNICAL SUPPORT CENTER
Numerous resources are available to assist with answering your pre- and post-sale technical product questions, from specifications, to installation, to operational troubleshooting.
Phone: 800.528.2806
Website: LiftMasterDealer.custhelp.com/app/ask

ONLINE SUPPORT
Find links to user manuals, service bulletins, support videos and our extensive product knowledge base for how-to documents at **LiftMaster.com/Customer-Support**

Conveniently find FAQs to all your technical product needs.

LIFTMASTER TRAINING ACADEMY
Educational tools and materials are available for our customers on all of the LiftMaster product offerings, safety standards and industry trends. Online training, regional seminars, online webinars and dedicated training events are available by contacting us.
Online: LiftMasterTraining.com
Email: TrainingAcademy@LiftMaster.com
Phone: 877.872.4650

For Complete Information on Our Products visit LiftMaster.com/TOTALPAS and for information on Our myQ® Business™ Software Solution visit myq.com/connected-business.

LiftMaster®

ACCESS CONTROL PRODUCT SPECIFICATIONS.

FEATURE	CAPXL	CAP2D	EL2000SS	EL25	EL1SS
SYSTEM FEATURES					
Cloud Connected	Yes	Yes	Data Backup	Data Backup	No
Real-Time Event Monitoring	Yes	Yes	No	No	No
Text/Email Notifications	Yes	Yes	No	No	No
Local Event History	50,000	6,000	4,000	4,000	No
Local Resident/Programmable Entry Code Capacity	50,000	25,000	2,000	2,000	No Directory/ 200 Entry Codes
Voice Communication	Wi-Fi/Cellular/Wired High-Speed Internet/DSL	N/A	POTS/Filtered DSL	POTS/Filtered DSL	Intercom/ POTS/Filtered DSL
Data Connectivity	Wi-Fi/Cellular/Wired High-Speed Internet/DSL	Cellular/Wired High-Speed Internet/DSL	Dial-up Modem/ Direct Connect/Keypad	Dial-up Modem/ Direct Connect/Keypad	Keypad
Software	myQ® Business™	myQ® Business™	Versa XS 4.0	Versa XS 4.0	None
BASIC INPUT/OUTPUT					
Wiegand Inputs	4	2	Up to 4 Wiegand inputs, with 2 (optional) plug-in modules (Part #WOMODKT)	Up to 4 Wiegand inputs, with 2 (optional) plug-in modules (Part #WOMODKT)	None
Gate/Doors of Control	4	2	4	4	2
Additional Gate/ Door Expansion	Virtually unlimited	Virtually unlimited	Shared telephone line for 7 units	Shared telephone line for 7 units	None
Radio Receiver	Security+ 2.0® Passport	Optional Security+ 2.0 PPWR	Optional Security+ 2.0 PPWR	Optional Security+ 2.0 PPWR	None
PANEL					
Display Type	10" High-Def Touch Display	None	Monochromatic 5" screen; 4 display lines, 20 characters/line	None	None
Postal Lock	Built-in	None	Built-in	None	None
Camera Ready	Yes	No	Yes	Yes	None
Mounting Options	Surface/Flush/ Gooseneck	Surface/Standard Gang Box	Surface/Flush/Gooseneck	Surface/ Gooseneck	Surface/ Gooseneck
Temperature Range	-20°F to 130°F (-29°C to 54°C)	-31°F to 150°F (-35°C to 66°C)	-4°F to 149°F (-20°C to 65°C)	-4°F to 149°F (-20°C to 65°C)	-4°F to 149°F (-20°C to 65°C)
Height	18 in.	4.5 in.	16 in.	10.25 in.	6.25 in.
Width	14 in.	3 in.	11.25 in.	6 in.	10 in.
Depth	4.5 in.	1.25 in.	3.25 in.	4 in.	5.25 in.
Warranty	2 year	2 year	2 year	2 year	2 year

LiftMaster®